

DH-IPC-HDBW5300/5302

3Megapixel Full HD Network IR Dome Camera



Features

- 1/3" 3Megapixel progressive scan Aptina CMOS
- H.264 & MJPEG dual-stream encoding
- Max 20fps@3M(2052×1536) & 25/30fps@1080P(1920×1080)
- DWDR, Day/Night(ICR), 3DNR, Auto iris, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 2.7 ~12mm varifocal lens (HDBW5300)
3 ~9mm varifocal motorized lens (HDBW5302)
- Built-in 1/1 alarm in/out
- Max. IR LEDs length 20m
- Micro SD memory, IP66, IK10, PoE,

DH-IPC-HDBW5300/5302



Technical Specifications

Model		IPC-HDBW5300	IPC-HDBW5302
Camera			
Image Sensor		1/3" 3Megapixel Aptina CMOS	
Effective Pixels		2048(H)x1536(V)	
Scanning System		Progressive	
Electronic Shutter Speed		Auto/Manual 1/3~1/10000	
Min. Illumination		Color: 0. 1Lux/F1.2, B/W: 0.01Lux/F1.2; 0Lux/F1.2(IR on)	
S/N Ratio		More than 50dB	
Video Output		1 port	
Camera Features			
Max. IR LEDs Length		20m	
Day/Night		Auto(ICR)/Color/B/W	
Backlight Compensation		BLC / HLC / DWDR	
White Balance		Auto	
Gain Control		Auto/Manual	
Noise Reduction		3D	
Privacy Masking		Up to 4 areas	
Lens			
Focal Length		2.7 -12mm	3 -9mm motorized
Max Aperture		F1.4	F1.2
Focus Control		Manual	Auto
Angle of View		H: 82°(Wide)~ 25°(Tele)	H: 86.5°(Wide)~ 28.6°(Tele)
Lens Type		Manual /Auto Iris(DC)	Motorized /Auto Iris(DC)
Mount Type		Board-in Type	
Video			
Compression		H.264 / MJPEG	
Resolution		3M(2048×1536)/1080P(1920×1080) / 720P(1280×720) /D1(704×576) / CIF(352×288)	
Frame Rate	Main Stream	3M(1~20fps)/1080P/720P(1~25/30fps)	
	Sub Stream	D1/CIF(1 ~ 25/30fps)	
Bit Rate		H.264: 32K ~ 8192Kbps	
Audio			
Compression		G.711a / G.711u/ PCM	
Interface		1/1 channel In/Out	
Network			
Ethernet		RJ-45 (10/100Base-T)	
Wi-Fi		N/A	
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	

DH-IPC-HDBW5300/5302

ONVIF	ONVIF Profile S
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD, Max 64GB
RS485	N/A
Alarm	1/1 channel In/Out
PIR Sensor Range	N/A
General	
Power Supply	DC12V/AC24V, PoE(802.3af)
Power Consumption	Max 5W (Motorized lens: +3.5W)
Working Environment	-20°C~+60°C , Less than 90%RH
Ingress Protection	IP66
Vandal Resistance	IK10
Dimensions	Φ151mm×119mm
Weight	1.25kg

Dimensions (mm)

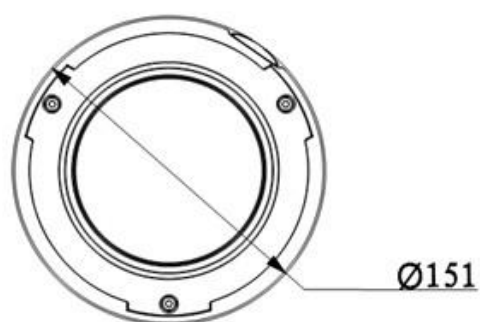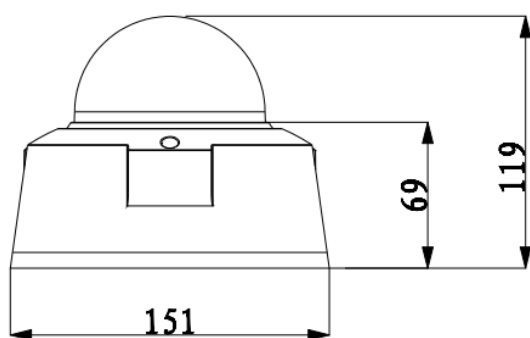

DH-IPC-HDBW5300/5302

Accessories (optional)

				
PFA100	PFB300S	PFA120	PFB150	PFB151

Dahua Technology Co., Ltd. 1187BinAn Road, Binjiang District, Hangzhou, China
Tel: 66956096-09126017817-09107616575
email:imensazaa@gmail.com
www.irandahua.com