

DH-HAC-HDW1200E

2Megapixel 1080P Water-proof IR HDCVI Dome Camera



Features

- 1/2.7" 2Megapixel CMOS
- 25/30fps@1080P
- High speed, long distance real-time transmission
- Day/Night(ICR), AWB, AGC, BLC, 2D-DNR
- 3.6mm fixed lens (6mm optional)
- Max. IR LEDs length 50m, Smart IR
- IP67, DC12V


DH-HAC-HDW1200E

Technical Specifications

Model	DH-HAC-HDW1200EP		DH-HAC-HDW1200EN
Camera			
Image Sensor	1/2.7" 2Megapixel CMOS		
Effective Pixels	1930(H)×1088(V)		
Electronic Shutter	1/50s~1/100,000s	1/60s~1/100,000s	
Video Frame Rate	25fps@1080P	30fps@1080P	
Synchronization	Internal		
Mini. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on		
Video Output	1-channel BNC HDCVI high definition video output		
Camera Features			
Max. IR LEDs Length	50m, Smart IR		
Day/Night	Auto(ICR) / Color / B/W		
Noise Reduction	2D		
Lens			
Focal Length	3.6mm (6mm optional)		
Angle of View	H: 89.9° (59.4°)		
Mount Type	M12		
General			
Power Supply	DC12V±20%		
Power Consumption	Max 3.6W		
Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)		
Transmission Distance	Over 500m via 75-3 coaxial cable		
Ingress Protection	IP67		
Dimensions(W×D×H)	Φ110mm×95.0mm		
Weight	0.3kg		
Material	Metal (inner core) + Plastic (outside)		

DH-HAC-HDW1200E

Dimensions (mm)

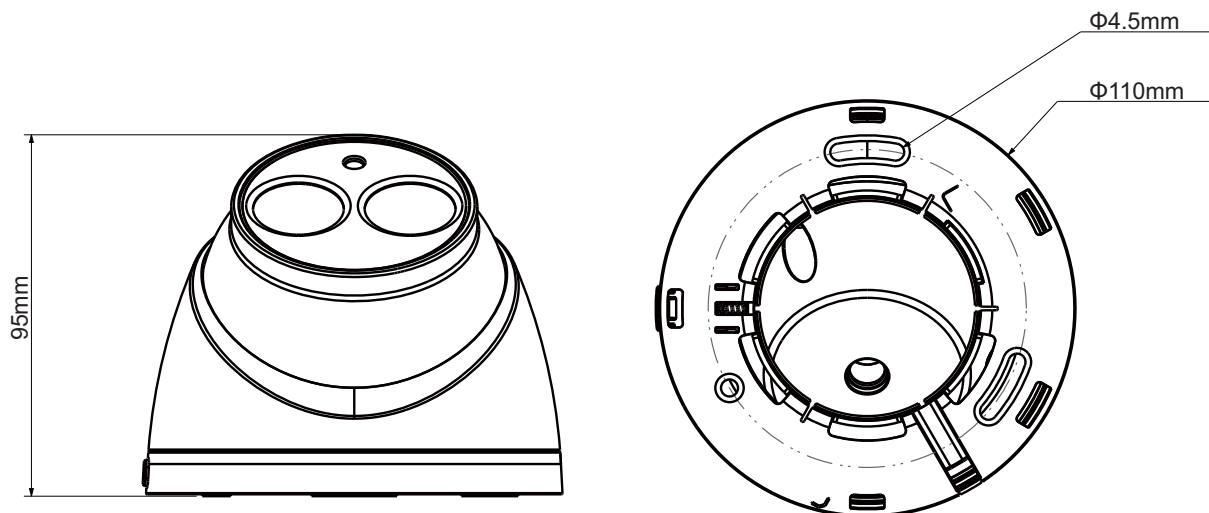

Accessories (optional)

		
PFB200W	PFA136	PFA152

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.