

DH-HAC-HFW2100B

1.3Megapixel 720P Water-proof IR HDCVI Camera



Features

- 1/3" 1.3Megapixel CMOS
- 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and standard definition switch.
- OSD Menu, control over coaxial cable
- Day/Night(ICR), AWB, AGC, BLC, 3D-DNR
- 6mm fixed lens (2.8 mm, 3.6mm, 8mm optional)
- Max. IR LEDs length 30m, Smart IR
- IP66, DC12V


DH-HAC-HFW2100B

Technical Specifications

Model	DH-HAC-HFW2100BP		DH-HAC-HFW2100BN
Camera			
Image Sensor	1/3" 1.3Megapixel CMOS		
Effective Pixels	1280(H)×960(V)		
Electronic Shutter	4/25s~1/45,000s	4/30~1/54,000s	
Video Frame Rate	1280×720@25 fps; 1280×720@30 fps; 1280×720@50 fps; 1280×720@60 fps		
Synchronization	Internal		
Min. Illumination	0.01Lux@F1.2(0Lux IR LED on)		
Video Output	1-channel BNC HDCVI high definition video output/ CVBS standard definition video output (Can switch)		
Camera Features			
Max. IR LEDs Length	30m, Smart IR		
Day/Night	Auto(ICR)/B&W/Color		
Noise Reduction	3D/2D		
OSD Menu	Support		
Lens			
Focal length	6mm (2.8 mm, 3.6mm, 8mm optional)		
Mount Type	M12		
General			
Power Supply	DC12V±10%		
Power Consumption	Max 6W		
Working Environment	-30°C~+60°C Humidity is less than 95%(no condensation)		
Transmission Distance	Over 500m via 75-3 coaxial cable		
Ingress Protection	IP66		
Dimensions(W×D×H)	89.1mm×200.2mm×80.4mm		
Weight	580g		

DH-HAC-HFW2100B

Dimensions (mm)

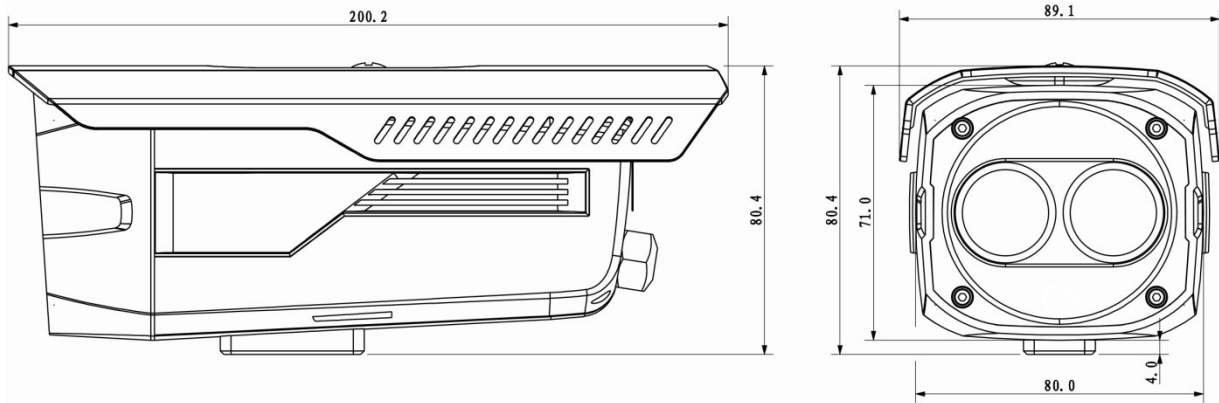

Dahua Technology Co., Ltd. 1187BinAn Road, Binjiang District, Hangzhou, China
Tel: 66956096-09126017817-09107616575
email:imensazaa@gmail.com
www.irandahua.com