

DH-SD6A220I/230I-HC

2Mp 1080P 20x/30x HDCVI IR PTZ Dome Camera



Features

- 20x/30x optical zoom
- Max 25/30fps@1080P, 50/60fps@720P resolution
- DWDR, Day/Night(ICR), Ultra DNR, Auto iris, Auto focus
- Control over coaxial cable, long distance real-time transmission
- Max 240°/s pan speed, 360° endless pan rotation
- Up to 300 presets, 5 auto scan, 8 tour, 5 pattern
- Built-in 2/1 alarm in/out
- Support intelligent 3D positioning with DH-SD protocol
- IR Distance up to 150m
- IP66, OSD

DH-SD6A220I/230I-HC


Technical Specifications

Model	DH-SD6A220I-HC		DH-SD6A230I-HC	
Camera				
Image Sensor	1/2.8" Exmor CMOS			
Effective Pixels	1920(H) x 1080(V)			
Scanning System	Progressive			
Electronic Shutter Speed	1/1 ~ 1/30,000s			
Min. Illumination	Color: 0.05Lux@F1.4; B/W: 0.005Lux@F1.4; 0Lux (IR on)		Color: 0.05Lux@F1.6; B/W: 0.005Lux@F1.6; 0Lux (IR on)	
S/N Ratio	More than 55dB			
Resolution	25/30fps@1080P, 25/30/50/60fps@720P			
Video Output	1-channel BNC HDCVI high definition video output			
Camera Features				
Day/Night	Auto(ICR) / Color / B/W			
Backlight Compensation	BLC / HLC / DWDR (Digital WDR)			
White Balance	Auto, ATW, Indoor, Outdoor, Manual			
Gain Control	Auto / Manual			
Noise Reduction	2D/3D			
Privacy Masking	Up to 24 areas			
Digital Zoom	16x			
Lens				
Focal Length	4.7mm~94mm (20x Optical zoom)		4.3mm~129mm (30x Optical zoom)	
Max Aperture	F1.4 ~ F2.6		F1.6 ~ F5.0	
Focus Control	Auto / Manual			
Angle of View	H: 54.1° ~ 3.2°		H: 65.1° ~ 2.34°	
Close Focus Distance	100mm~ 1000mm			
PTZ				
Pan/Tilt Range	Pan: 0° ~ 360° endless; Tilt: -10° ~ 90°, auto flip 180°			
Manual Control Speed	Pan: 0.1° ~200° /s; Tilt: 0.1° ~120° /s			
Preset Speed	Pan: 240° /s; Tilt: 200° /s			
Preset	300(DH-SD), 255(Pelco-P/D)			
PTZ Mode	5 Pattern, 8 Tour, Auto Pan, Auto Scan			
Speed Setup	Human-oriented focal length/ speed adaptation			
Power up Action	Auto restore to previous PTZ and lens status after power failure			
Idle Motion	Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period			
Time Task	Auto activation of Preset/ Pan/ Scan/ Tour/ Pattern by preset-time			
Protocol	DH-SD, Pelco-P/D (Auto recognition)			
IR Distance	150m			
Audio				

DH-SD6A220I/230I-HC

Interface	1 channel In
Auxiliary Interface	
RS485	1
Alarm	2/1 channel In/Out
General	
Power Supply	AC 24V/3A ($\pm 10\%$)
Power Consumption	15.2W, 38.2W (IR on, Heater on)
Working Environment	-40°C ~ 70°C / Less than 90% RH
Ingress Protection	IP66
Vandal Resistance	N/A
Dimensions	$\Phi 252(\text{mm}) \times 384.3 (\text{mm})$
Weight	6.75kg

Dimensions (mm)

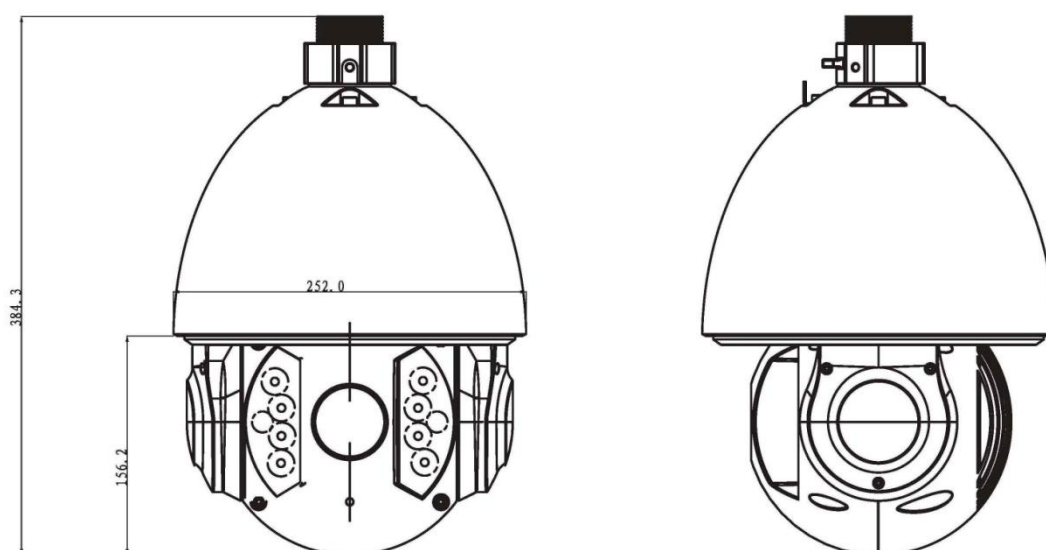

DH-SD6A220I/230I-HC

Accessories

		
DH-PFB303W	DH-PFA111	Power Supply

Accessories (Optional)

		
DH-PFB300C	DH-PFA112	DH-PFA113

		
DH-PFA120	DH-PFA150	DH-PFA151

Dahua Technology Co., Ltd. 1187BinAn Road, Binjiang District, Hangzhou, China
 Tel: 66956096-09126017817-09107616575
 email: imensazaa@gmail.com
 www.irandahua.com