

DH-HAC-HFW2120R-VF

1.3Megapixel 720P Water-proof HDCVI IR-Bullet Camera



Features

- 1/3" 1.3Megapixel CMOS
- 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and SD switchable
- OSD Menu, control over coaxial cable
- DWDR, Day/Night(ICR), AWB, AGC, BLC, 3DNR
- 2.7~12mm vari-focal lens
- Max. IR LEDs length 30m, Smart IR
- IP67, DC12V


DH-HAC-HFW2120R-VF

Technical Specifications

| Model | DH-HAC-HFW2120RP-VF | DH-HAC-HFW2120RN-VF |
|------------------------|--|---------------------|
| Camera | | |
| Image Sensor | 1/3" 1.3Megapixel CMOS | |
| Effective Pixels | 1305(H)×977(V) | |
| Electronic Shutter | 1/3s~1/100,000s | |
| Video Frame Rate | 25/50fps@720P | 30/60fps@720P |
| Synchronization | Internal | |
| Mini. Illumination | 0.01Lux/F1.4, 0Lux IR on | |
| Video Output | 1-channel BNC HDCVI high definition video output/ CVBS standard definition video output (Can switch) | |
| Camera Features | | |
| Max. IR LEDs Length | 30m, Smart IR | |
| Day/Night | Auto(ICR) / Color / B/W | |
| Noise Reduction | 2D/3D | |
| OSD Menu | Support | |
| Lens | | |
| Focal Length | 2.7~12mm | |
| Angle of View | H: 87.6° ~27.9° | |
| Lens Type | Manual / Fixed Iris | |
| Mount Type | Φ14 | |
| General | | |
| Power Supply | DC12V±20% | |
| Power Consumption | Max 2.6W | |
| Working Environment | -30°C~+60°C / Less than 95%RH (no condensation) | |
| Transmission Distance | Over 800m via 75-3 coaxial cable | |
| Ingress Protection | IP67 | |
| Dimensions(W×D×H) | 213mm×80mm×72mm | |
| Weight | 0.55kg | |
| Material | Metal | |

DH-HAC-HFW2120R-VF

Dimensions (mm)

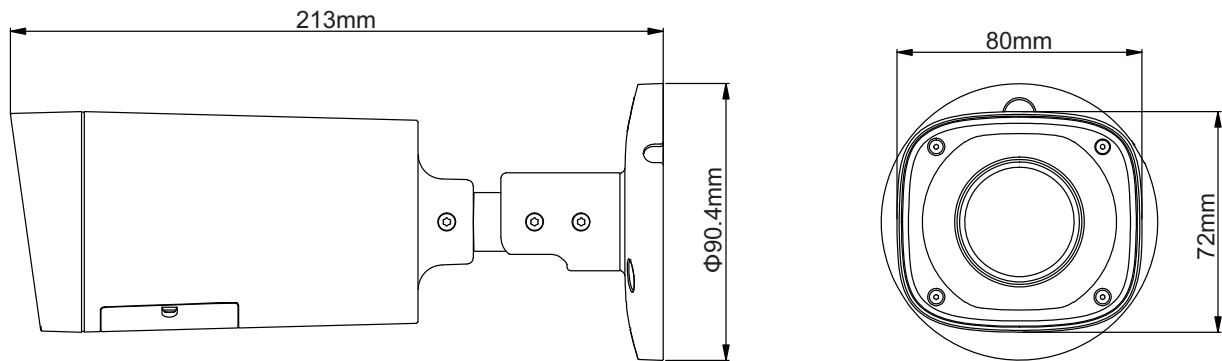

Accessories (optional)

