

DH-CA-FW480D

700TVL Water-proof IR-Bullet Camera



Features

- 1/3" SONY EXview HAD CCD II & Effio-E DSP
- High resolution of 700TVL
- Day/Night, AGC, AWB, BLC
- 6mm fixed lens (3.6mm, 8mm, 12mm optional)
- Max. IR LEDs length 50m, Smart IR
- IP66, DC12V


DH-CA-FW480D

Technical Specifications

Model	DH-CA-FW480DP		DH-CA-FW480DN
Camera			
Image Sensor	1/3" EXview HAD CCD II		
Effective Pixels	976(H)×582(V), 570K pixels	976(H)×494(V), 480K pixels	
Horizontal Resolution	700TVL		
Electronic Shutter	1/50s~1/100,000s	1/60s~1/100,000s	
Synchronization	Internal		
Min. Illumination	0.001Lux@F1.2(AGC ON), 0Lux IR on		
S/N Ratio	>65dB		
Video Output	1Vp-p Composite Output (75Ω/BNC)		
Camera Features			
Max. IR LEDs Length	50m, Smart IR		
Day/Night	Auto(Electronic) / Color / B/W		
Backlight Compensation	BLC		
White Balance	Auto		
Gain Control	Auto		
Lens			
Focal length	6mm (3.6mm, 8mm, 12mm optional)		
Angle of View	H: 46.5° (70° /35° /22.4°)		
Mount Type	M12		
General			
Power Supply	DC12V±10%		
Power Consumption	Max 5.5W		
Working Environment	-30℃~+60℃ / 20%~80%RH		
Ingress Protection	IP66		
Dimensions(W×D×H)	89.1mm×200.2mm×80.4mm		
Weight	0.45kg		

DH-CA-FW480D

Dimensions (mm)

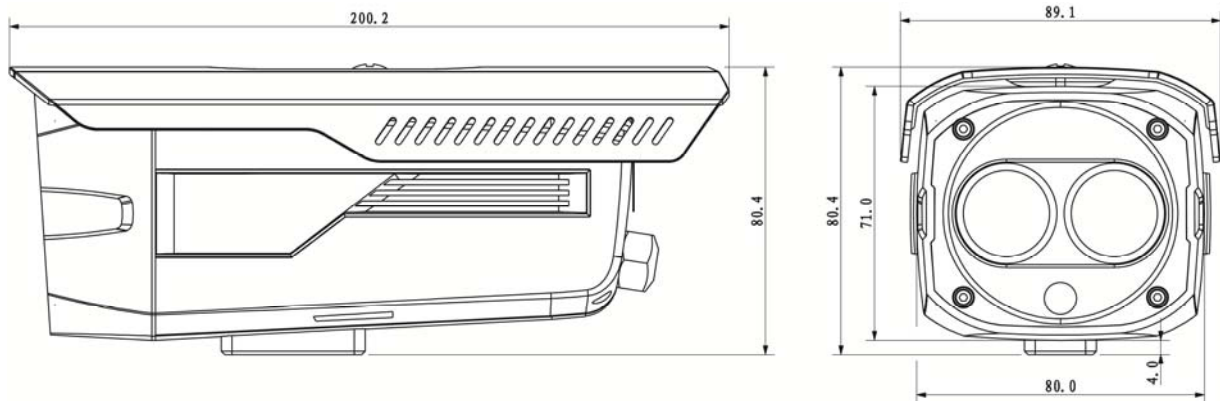

Accessories (optional)

				
PFB120W	PFB121W	PFA121	PFA150	PFA152