

## DH-IPC-HD1200C-W

---

2MP Full HD Wi-Fi Mini Dome Camera



### Features

- 1/3" 3Megapixel progressive scan CMOS
- H.264 & MJPEG dual-stream encoding
- Max 25/30fps@1080P(1920×1080)
- DWDR, Day/Night, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 3.6mm fixed lens (2.8mm optional)
- Wi-Fi support
- DC12V

# DH-IPC-HD1200C-W

## Technical Specifications

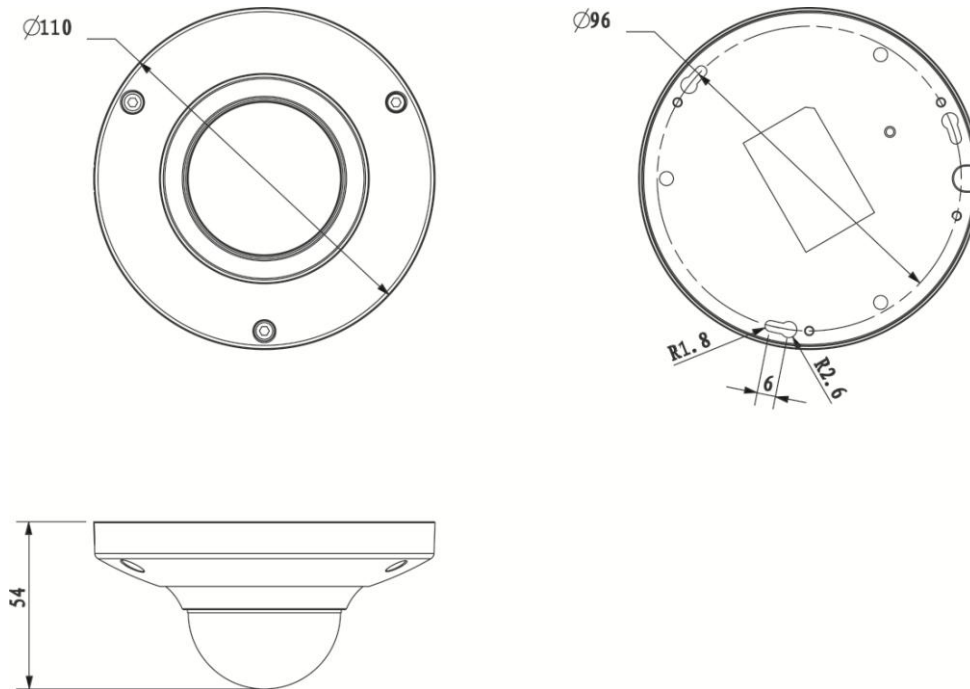
|                          |  |                         |
|--------------------------|--|-------------------------|
| <b>Model</b>             |  | <b>DH-IPC-HD1200C-W</b> |
| <b>Camera</b>            |  |                         |
| Image Sensor             | 1/3" 3Megapixel progressive scan CMOS  |                         |
| Effective Pixels         | 2048(H)x1536(V)  |                         |
| Scanning System          | Progressive  |                         |
| Electronic Shutter Speed | Auto/Manual 1/3 (4) ~1/10000   |                         |
| Min. Illumination        | 0.1Lux/F1.8(color), 0Lux/1.8(IR on)  |                         |
| S/N Ratio                | More than 50dB   |                         |
| Video Output             | N/A  |                         |
| <b>Camera Features</b>   |  |                         |
| Max. IR LEDs Length      | N/A  |                         |
| Day/Night                | Auto(Electronic) / Color / B/W   |                         |
| Backlight Compensation   | BLC /HLC /DWDR   |                         |
| White Balance            | Auto   |                         |
| Gain Control             | Auto/Manual  |                         |
| Noise Reduction          | 2D   |                         |
| Privacy Masking          | Up to 4 areas  |                         |
| <b>Lens</b>              |  |                         |
| Focal Length             | 3.6mm (2.8mm optional)   |                         |
| Max Aperture             | F1.8(F2.0)   |                         |
| Focus Control            | Manual   |                         |
| Angle of View            | H:73°(90°)   |                         |
| Lens Type                | Fixed  |                         |
| Mount Type               | Board-in Type  |                         |
| <b>Video</b>             |  |                         |
| Compression              | H.264 / MJPEG  |                         |
| Resolution               | 1080P(1920×1080)/720P(1280×720)/D1(704×576/704×480)/CIF(352×288/352×240)/  |                         |
| Frame Rate               | Main Stream  | 1080P(1 ~ 25/30fps)     |
|                          | Sub Stream   | D1/CIF(1 ~ 25/30fps)    |
| Bit Rate                 | H.264: 56K ~ 8192Kbps  |                         |
| <b>Audio</b>             |  |                         |
| Compression              | N/A  |                         |
| Interface                | N/A  |                         |
| <b>Network</b>           |  |                         |
| Ethernet                 | RJ-45 (10/100Base-T)   |                         |
| Wi-Fi                    | Wi-Fi(802.11b/g/n)   |                         |
| Protocol                 | IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour |                         |
| ONVIF                    | ONVIF ,CGI   |                         |

## DH-IPC-HD1200C-W



|                            |                                      |
|----------------------------|--------------------------------------|
| Max. User Access           | 20 users                             |
| Smart Phone                | iPhone, iPad, Android, Windows Phone |
| <b>Auxiliary Interface</b> |                                      |
| Memory Slot                | N/A                                  |
| RS485                      | N/A                                  |
| Alarm                      | N/A                                  |
| PIR Sensor Range           | N/A                                  |
| <b>General</b>             |                                      |
| Power Supply               | DC12V                                |
| Power Consumption          | <4W                                  |
| Working Environment        | -30°C~+50°C, Less than 95%RH         |
| Ingress Protection         | N/A                                  |
| Vandal Resistance          | N/A                                  |
| Dimensions                 | Φ110×54mm                            |
| Weight                     | 0.25kg                               |

# DH-IPC-HD1200C-W

## Dimensions (mm)



## Accessories (optional)

|   |   |
|---|---|
|  |  |
| PFA131  | PFB200W   |